
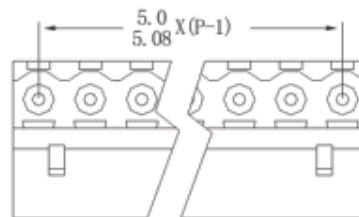



XY2500F-A(5.0)

Poles: Any poles (2-24P)
Pitch: 5.0mm 5.08mm

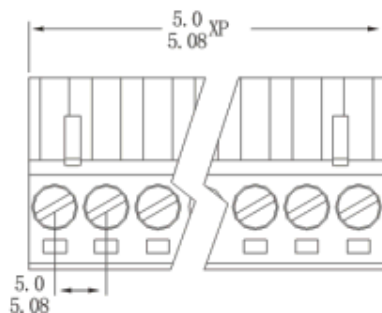

XY2500F-B(5.08)

Voltage Rating: 300V
Current Rating: 12A
Wire range: 18-12AWG 2.5mm²
Housing: PA66 (UL 94V-0)
Wire Cage: Brass(Nickel Plated) or
Steel(Zinc Plated)
Clamp: Phosphor Bronze, Nickel Plated
Screw: M2.5, Steel(A3), Zinc Plated
Torque: 0.4N.m

额定电压: 300V
额定电流: 12A
使用线径: 18-12AWG 2.5mm²
塑件: 尼龙66 (UL 94V-0)
接触保护材料: 黄铜, 镀镍
或铁, 镀锌
弹片(触点)材料: 磷青铜, 镀镍
螺丝材料: M2.5, A3钢, 镀锌
扭矩: 0.4N.m

Ksvk 5.08# xx X2500F-B
Ksvk 5.08# xx X2500F-A



SEMIC TRADE, s.r.o.
Volutová 2521/18
158 00 Praha 5
Czech Republic

www.semic.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377
fax: +420 251 626 252, 393