

Aluminum Electrolytic Capacitors

Load life of 2000 hours at 85 °C

7mm Height

Used in Car Audio,DVD, VCD, Air Conditions Circuits

For general purpose, Standard

Specifications:

Operating Temperature Range(°C): -40~+85

Rated Voltage Range(V): 6.3~63

Nominal Capacitance Range(μF): 0.1~470

Capacitance Tolerance(20 °C,120Hz) : 20%

Leakage current (I ≤ 0.01CV or 3uA ; whichever is smaller(at 25 °C ,after 2 minutes)
μA):



Dissipation Factor(25 °C,120Hz)

Rated Voltage (V)	6.3	10	16	25	35	50	63
tan δ	0.24	0.2	0.16	0.14	0.12	0.1	0.1
when nominal capacitance is over 1000uF tan δ shall be added 0.02 to the listed							

Temperature Stability(120Hz)

Rated voltage(v)	6.3	10	16	25	35	50	63
Impedance Ratio	Z-25°C/Z+20°C	4	3	2	2	2	2
	Z-40°C/Z+20°C	8	6	4	4	3	3

Load Life(+85 °C)


Load Life(+85 °C)		Shelf Life(+85 °C)	
Time	After applying rated voltage for 2000 Hours at +85°C and then resumed 16 Hours	Time	After Storage for 1000 Hours at +85°C and then resumed 16 Hours
Leakage Current	Not more than the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.	Capacitance Change	Within ±20% of the initial value.
Dissipation Factor	Not more than 200% of the specified value.	Dissipation Factor	Not more than 200% of the specified value.

After test:Rated Voltage to be applied for 30 minutes, 24 to 48 hours before measurement.

Frequeney coefficient

Frequency (Hz)	50Hz	120Hz	1KHz	10KHz	100K
Rated Voltage (V)					
6.3~16	0.8	1.00	1.10	1.20	1.20
25~35	0.8	1.00	1.50	1.70	1.70
50~63	0.8	1.00	1.60	1.90	1.90

Dimensions : (Unit:MM)

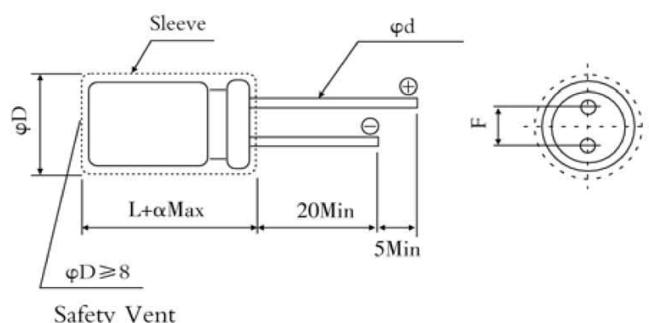

Lead spacing and diameter: (Unit:MM)			
ΦD	4	5	6
F	1.5	2	2.5
φd	0.45		0.5

Aluminum Electrolytic Capacitors

Standard Ratings

WV(V)	6.3		10		16		25		35		50		63	
Cap (μF)	Size	Ripple												
	ΦDxL	mArms												
0.1	-	-	-	-	-	-	-	-	-	-	4x7	1	-	-
0.22	-	-	-	-	-	-	-	-	-	-	4x7	2	-	-
0.33	-	-	-	-	-	-	-	-	-	-	4x7	3	-	-
0.47	-	-	-	-	-	-	-	-	-	-	4x7	4	-	-
1	-	-	-	-	-	-	-	-	-	-	4x7	9	4x7	11
2.2	-	-	-	-	-	-	-	-	4x7	13	4x7	14	4x7	16
3.3	-	-	-	-	-	-	4x7	13	4x7	16	4x7	17	5x7	20
4.7	-	-	-	-	4x7	16	4x7	16	4x7	19	4x7	22	5x7	26
10	-	-	4x7	21	4x7	24	4x7	19	5x7	29	5x7	34	6x7	40
22	4x7	29	4x7	33	4x7	37	5x7	29	6x7	45	6x7	53	-	-
33	4x7	37	4x7	41	5x7	48	5x7	45	6x7	59	-	-	-	-
47	4x7	44	4x7	51	5x7	57	6x7	59	-	-	-	-	-	-
100	5x7	68	5x7	75	6x7	89	8x7	95	-	-	-	-	-	-
220	6x7	101	6x7	118	8x7	120	-	-	-	-	-	-	-	-
330	8x7	132	8x7	135	-	-	-	-	-	-	-	-	-	-
470	8x7	144	8x7	150	-	-	-	-	-	-	-	-	-	-

Rated Ripple Current: 85 °C, 100Hz or 120Hz

The Specific capacitance and case size are available on request by customer